



## The Complete Cable Management System


[www.cableductuk.com](http://www.cableductuk.com)

30 Selhurst Road, South Norwood, London SE25 5QF


Telephone: +44 (0)20 8683 1126

Facsimile : +44 (0)20 8689 7896

VAT Reg. No. 217 8706 49

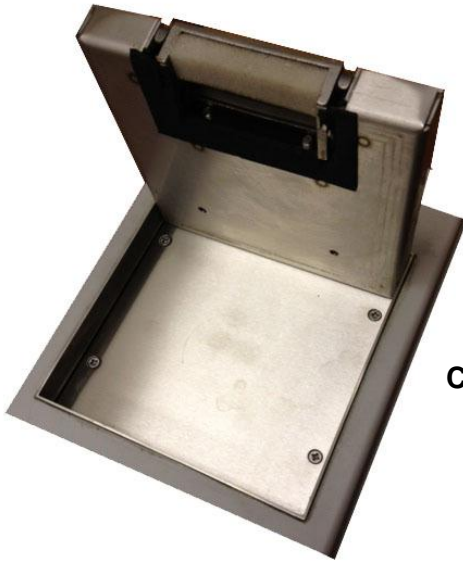

### Cableduct 700 series IP44 rated floor box User instructions

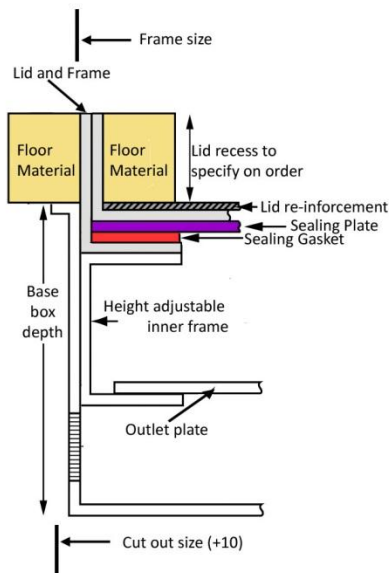

#### Installation of the floor box

1. Mount the base box securely in the sub floor
2. Using the adjustment screws on the height adjustable inner frame to level the lid and frame to the surrounding floor material
3. Lay the floor material up to the outer frame, and inside the lid of the floor box
4. Use a waterproof sealant to ensure a watertight seal between the surrounding floor material and the frame of the floor box
5. The box is supplied fitted with a sealing plate. A user plate is supplied loose. When installed the box should be fitted with the sealing plate, and the user should be given the loose user plate.

#### Use of the floor box

1. When the socket is not in use the floor box should always be fitted with the sealing plate
2. When the socket is required to be used, remove the sealing plate by unscrewing the 2 x M5 screws
3. Replace the sealing plate with the user plate. Note that the box is NOT sealed when the sealing plate has been removed and the box must not be subjected to water. Whilst the box is being used the outlet flap will be in an open position.
4. Once the box is no longer required for use, the user plate must be replaced with the sealing plate.
5. The box is designed to allow water ingress through the lid, but to seal against the water accessing the socket enclosure. After the box (fitted with sealing plate) has been subject to wet washing, the area inside the lid must be allowed to dry fully before removing the sealing plate.



Sealing Plate



User Plate