



- Designed for cable access between sub-floor and desk
- Available in either stainless steel or brass, with or without a trim flange, and either recessed to suit your floor covering or with a flat lid
- The base unit provides secure on site fixing together with height adjustability for perfect on site levelling
- The base unit is required for trimless grommets. If using a trim flange the base is optional but it is required if the grommet is to be load bearing




Available sizes:

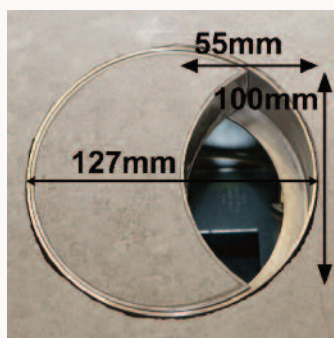


127mm diameter trimless

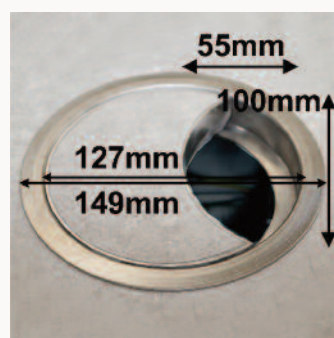

127mm diameter with trim flange

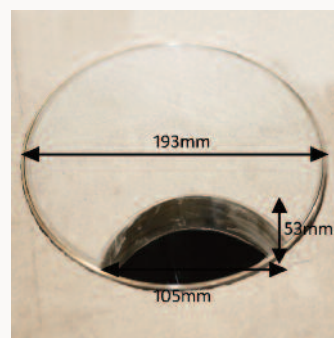


193mm diameter trimless

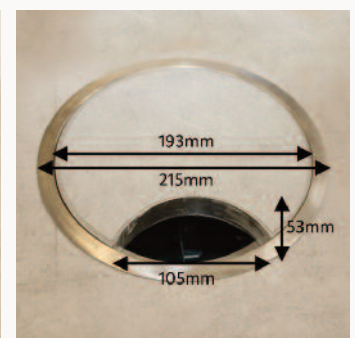

193mm diameter with trim flange


Installation options:

Standard base install

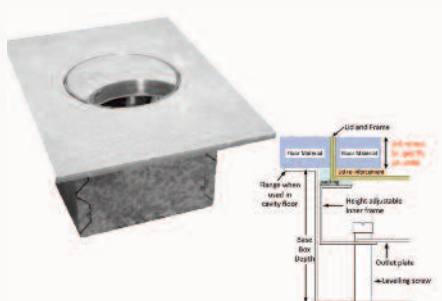


Supplied with a standard fit large base unit. The grommet is supported by the inner frame and can be adjusted up or down for perfect levelling. Suitable with or without trim flange.

Retro base install

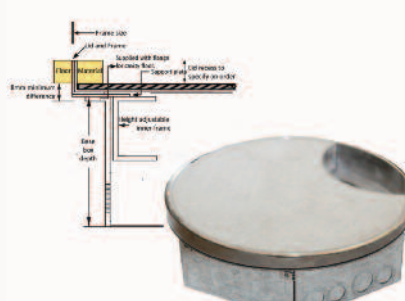

Supplied with a retro style base. There is an 8mm difference in height between the cavity floor flange and the inside of the lid. Only upward adjustment is possible. Suitable with or without trim flange

No base - grommet site fixed

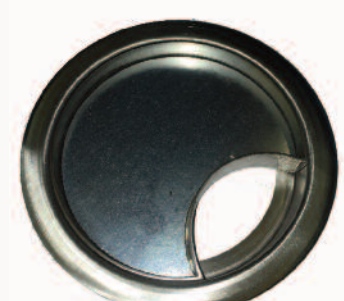

Supplied lid and frame only for site fixing. NOTE the flange is not load bearing, this option should only be used when the grommet is protected